

ODV-3-340240-3F12-MN

Optidrive Eco VFD Datasheet

11 kW (15 HP), 24 A, 380-480 V, 3PH
IP20 Variable Frequency Drive with EMC
Filter and TFT Display



Input Ratings

Supply Voltage	380-480 V
Input Phases	3
Supply Current Continuous	21.6 A
Supply Fuse or MCB (Type B)	25 A

Output Ratings

Motor Output Rating	11 kW (15 HP)
Output Voltage	0 – Supply Voltage
Output Current	24 A

Cable Information

Max Supply Cable Size	8 mm ² (0.01 sq in)
Max Motor Cable Size	8 mm ² (0.01 sq in)
Max Motor Cable Length	100 m (328 ft)

Factory Build Options

EMC Filter	Internal EMC
Brake Transistor	No Brake Transistor
Enclosure	IP20
Display	TFT Display
PCB Coating	Standard

Dimensions

Size	3
Height	261 mm (10.28 in)
Width	131 mm (5.16 in)
Depth	205 mm (8.07 in)
Weight	3.5 kg (7.72 lbs)
Fixings	4 x M4

Packaged Dimensions


Height	325 mm (12.8 in)
Width	165 mm (6.5 in)
Depth	260 mm (10.24 in)
Weight	3.7 kg (8.16 lbs)




 **Buy this drive or get more information**
Find your local sales partner on
invertekdrives.com

 **Inverter**
Drives.com

How we measure our drives and packaging

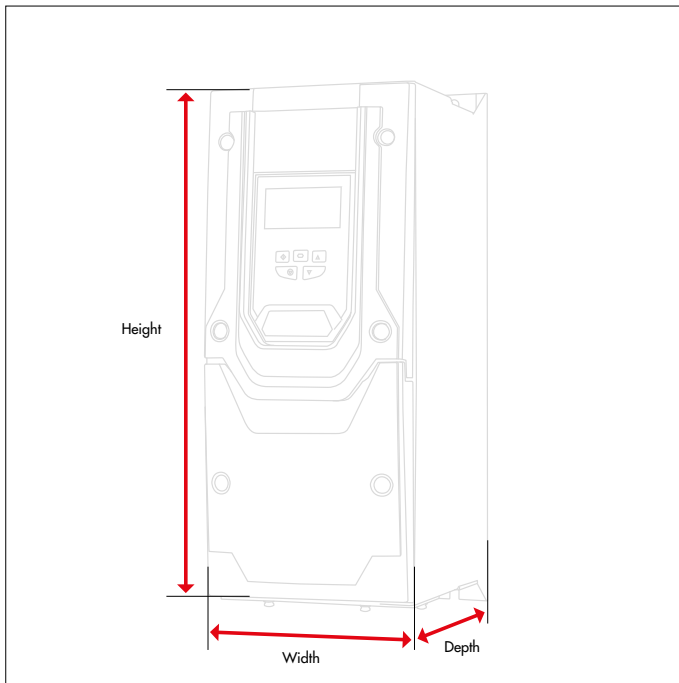

Drive Dimensions

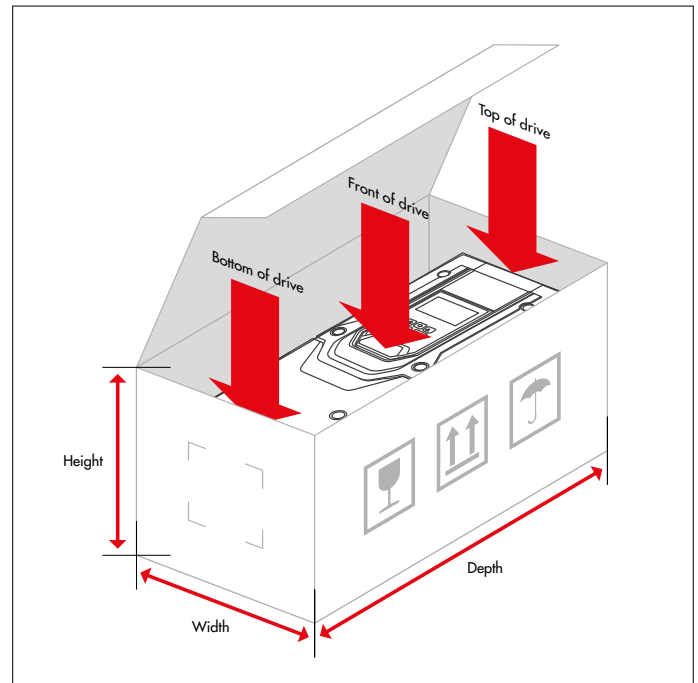

Packaging Dimensions



Buy this drive or get more information
Find your local sales partner on
invertekdrives.com

