# AMA-IE2 71K6 (B5)

AMTECS

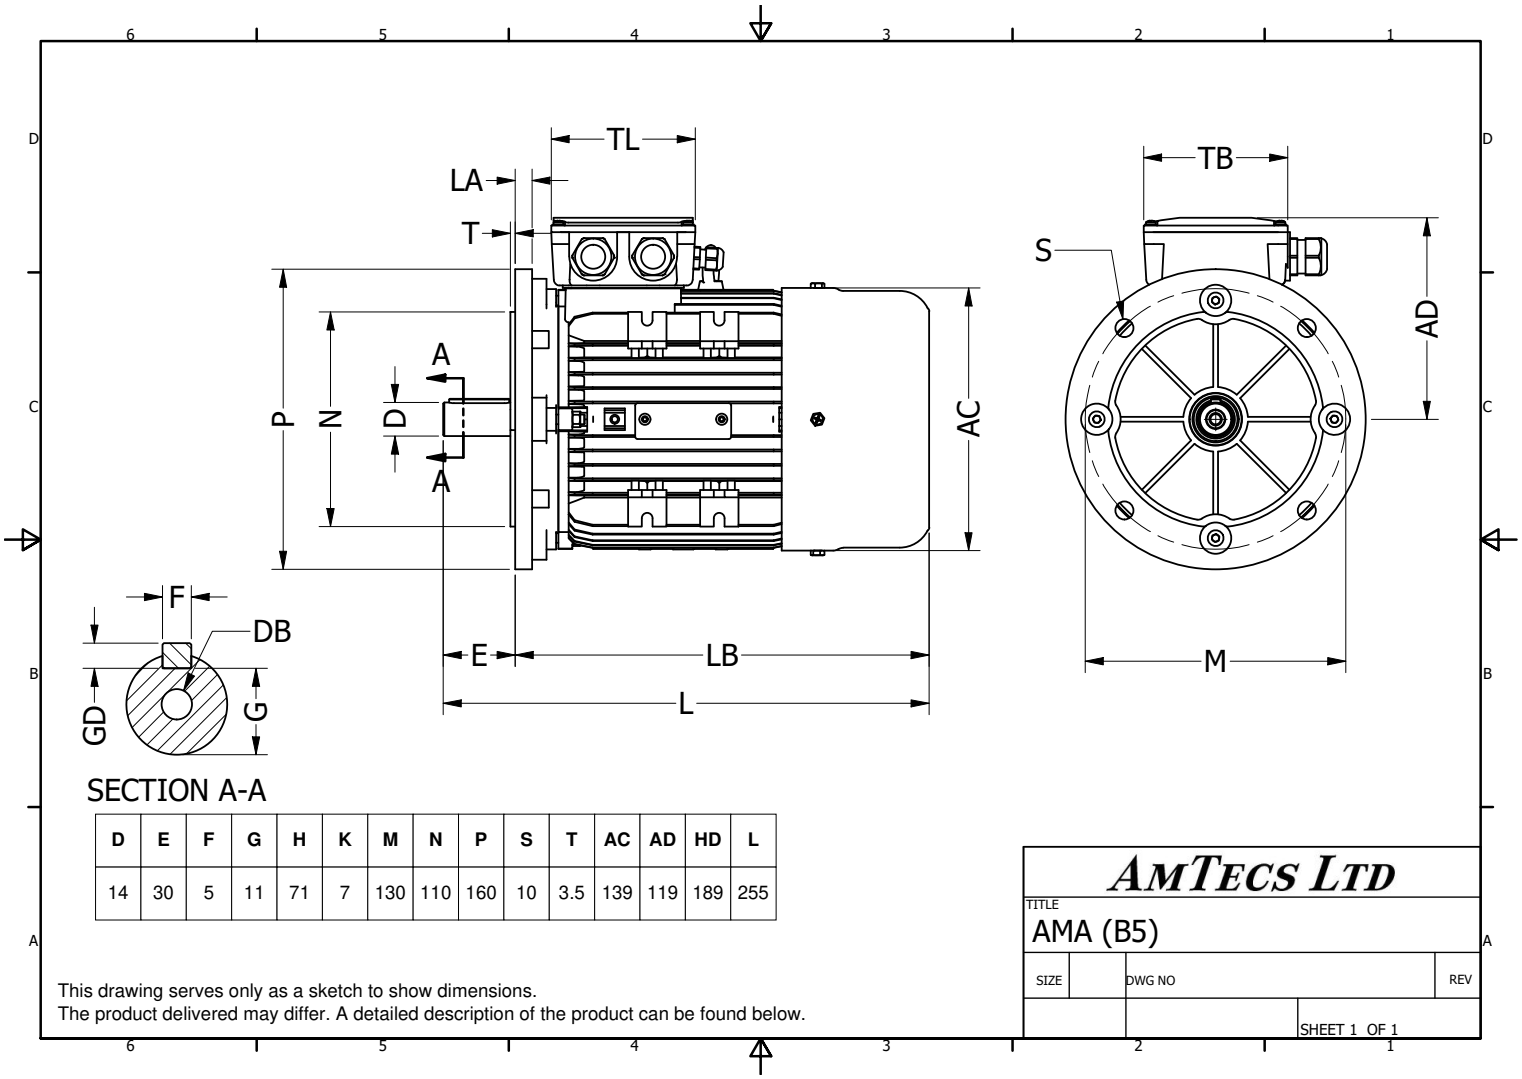


| D | E | F | G | H | K | M | N | P | S | T | AC | AD | HD | L |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 14 | 30 | 5 | 11 | 71 | 7 | 130 | 110 | 160 | 10 | 3.5 | 139 | 119 | 189 | 255 |

AMTECS LTD

TITLE
AMA (B5)

SIZE | DWG NO | REV

SHEET 1 OF 1

This drawing serves only as a sketch to show dimensions.
The product delivered may differ. A detailed description of the product can be found below.

| | | | |
|---|---|---|---|
| Specification | **IEC 60034-1** | Efficiency class | **IE2** |
| Manufacturer | **AmTecs** | Load data | 100% |
| Motor type | **AMA-IE2 71K6** | Efficiency | **56.6** % |
| Rated power | **0.18** kW **S1** Duty | Power factor | **0.63** |
| Speed | **920** rpm | Sound pressure level (1m) | **54** dB(A) |
| Voltage | **220V / 400V** | Resistance R20 (open) | |
| Frequency | **50** Hz | Resistance R20 (Delta) | |
| Connection | **Delta / Star** | | |
| Full load current | **1.27 A / 0.73 A** | Full load torque | **1.9** Nm |
| No-load current | | Starting / Full load torque | **2.3** |
| Enclosure | **IP55** | Pull up / Full load torque | |
| Insulation class | **F (temp. rise B)** | Pull out / Full load torque | **2.5** |
| Max. ambient temp | **40** °C | | |
| Max. altitude | **1000** mtr above sea level | | |
| Comment | | | |
| Cable entry | **M20 x 1.5** | Starting / Full load current (DOL) | **3.5** |
| Construction | **Aluminium** | Starting / Full load current (Y/D) | |
| Weight | **6.5** Kg | Rotor Inertia | |
| Type number | | Bearing DE | **6202** |
| Warranty | | Bearing NDE | **6202** |


**AmTecs Ltd**
Charnham Park, Hungerford
Berkshire, RG17 0YT
Tel: +44 (0) 1488 686970
Fax: +44 (0) 1488 686968
sales@amtecs.co.uk
www.amtecs.co.uk



*We make all efforts to better our products. Versions, technical data and figures could be changed therefore. They are not binding before written confirmation.*